

20 cooling fan

×20×10mm





General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量		静压		噪音
型号	B/S	V	V	A	W	RPM	m3/min	CFM	mm-H2O	In-H2O	dba
SP20B05L-10DL	S / B	5	4.5~5.5	0.10	0.50	9000	0.02	0.60	1.94	0.08	20.0
SP20B12L-10DL	S / B	12	7.0~13.2	0.07	0.35	9000	0.02	0.60	1.94	0.08	20.0
SP20B05M-10DL	S / B	5	4.5~5.5	0.15	0.75	12000	0.02	0.83	2.22	0.09	27.1
SP20B12M-10DL	S / B	12	7.0~13.2	0.10	1.20	12000	0.02	0.83	2.22	0.09	27.1
SP20B05H-10DL	S / B	5	4.5~5.5	0.20	1.00	18000	0.03	1.22	5.22	0.21	37.2
SP20B12H-10DL	S / B	12	7.0~13.2	0.15	0.75	18000	0.03	1.22	5.22	0.21	37.2

*Bearing system B: Two Ball Bearing S: Sleeve Bearing

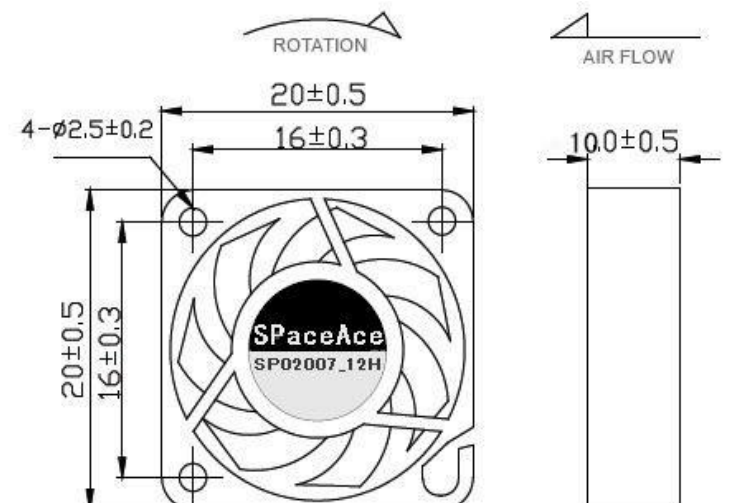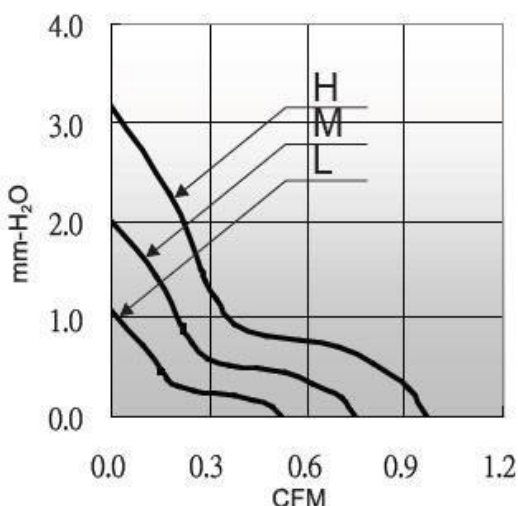

unit:mm